


Specification:


Model	Unit	MT-800P
TRAVEL		
X-axis Travel	mm	850
Y-axis Travel	mm	500
Z-axis Travel	mm	550
Distance From Spindle Nose To Table Surface	mm	150-700
Distance From Spindle Center To Z Telescopic cover	mm	650
SPINDLE		
Spindle Speed	rpm	Direct Driven 10000 (O.P 15000)
Spindle Motor	kw	7.5/11(★11/15)
Spindle Nose	BT	BT40
TABLE		
Table Dimension	mm	850×500
APC Change Time	sec	7 (180° Z-axis rotary)
T-slot Size	mm	18×5×100
Table Load Capacity	kgs	350
RAPID TRAVERSE		
Rapid Travel (X/Y/Z)	m/min	36/36/36(★48/48/48)
Cutting Speed Rate	m/min	1~10
Feed Motor (X/Y/Z)	kw	1.8/1.8/1.8
MAGAZINE		
Tool Change Type		Arm Type
Tool Capacity	set	24
Max. Tool Weight	kgs	15
Max. Tool Length (Without Adjacent Tools)	mm	200
Max. Tool Diameter	mm	80/150
Tool Change Time (T-T)	sec	1.5
Tool Change Time (C-C)	sec	4.5
OTHERS		
Compress Air Supply	kgs/cm ²	6
Machine Size (L x W x H)	mm	2000×3500×2500
Net Weight	kgs	5700
Gross Weight	kgs	6300

© The Above Specifications are Subject To Change Without Notice.

External Dimension:


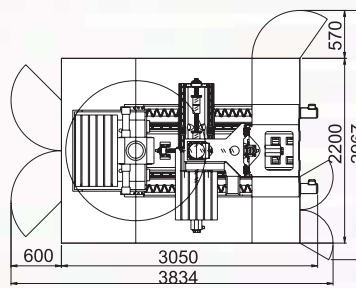


Top View



Front View

Table Size & T-Slot:

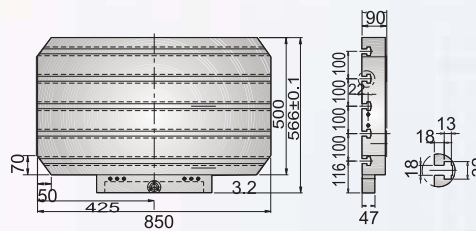

Side View

Standard Accessories:

- Direct Driven 10000 rpm
- Arm Type 24 Tool
- MAS BT-40
- MAS BT-40/P40-1
- Spindle Oil Cooler
- Air Blast Through Spindle
- MPG Handwheel
- Full Enclosure
- Work Light
- Alarm Lamp
- Leveling Bolts And Pads
- Tool Box
- Heat Exchange Cabinet
- One Year Warranty For Machine

Optional Accessories:

- Direct Driven 12000 rpm
- Direct Driven 15000 rpm
- Arm Type 32 Tool
- CAT-40
- Coolant Through Spindle
- Chip Conveyor
- Side Flush Coolant
- Tool Length Measurement System
- Air Blast
- Linear Scales(X axis)
- Linear Scales(Y axis)
- Linear Scales(Z axis)
- 4th Axis (CNC control table)
- 5th Axis (4th axis and rotary axis)



Hong Kong (Head Office)



L.K. NingBo, China



L.K. FuXin, China



L.K. Taiwan



L.K. ShenZhen, China



L.K. ZhongShan, China



L.K. ShangHai, China



L.K. ShenZhen, China

L.K. Taiwan:

L.K. MACHINERY CORP.

No. 10, Lane 308, Sec. 2, Shatian Rd.,
Dadu Township, Taichung County 432,
Taiwan.(R.O.C.)

Tel :886-4-2698-0065

Fax:886-4-2699-0341

E-mail:infosales@lkmachinery.com.tw

http://www.lkmachinery.com.tw

Worldwide Agent Wanted



MT-800P

Vertical Machining Center with Auto Pallet Changer



- One-piece oil water separation structure design
- Rapid travel 36m/min (opt. 48m/min)
- A shape wide column structure design
- Automatic pallet changer mechanism
- Built-in twin screw type chip conveyors
- Direct-driven spindle with standard 10,000rpm (opt. 15,000rpm)



L.K. MACHINERY CORP.